


STEEL / STEEL TRI-BULB BLIND RIVETS

TESTED ACCORDING TO IFI-135 AND ISO-14589

ALUMINUM / ALUMIN
TESTED ACCORDING TO IF

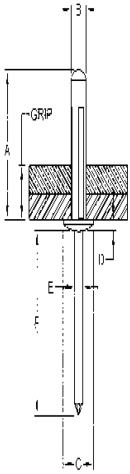

NOM DIA	PART#	GRIP RANGE		HOLE SIZE	HEAD DIA.	HEAD HT.	BODY LEN.	MAND DIA.	SHEAR LBS	TENSILE LBS
5/32"	S0516TB	.039	.118	#20 .160-.164	.315	.055	.630	.091	350	450
	S0523TB	.039	.276	#20 .160-.164	.315	.055	.835	.091	350	450
3/16"	S0619TB	.039	.157	#11 .192-.196	.386	.071	.720	.115	500	600
	S0622TB	.039	.248	#11 .192-.196	.386	.071	.807	.115	500	600
	S0625TB	.039	.354	#11 .192-.196	.386	.071	.925	.115	500	600
	S0630TB	.157	.472	#11 .192-.196	.386	.071	1.063	.115	500	600
1/4"	S0806TB	.063	.375	F .257-.261	.530	.120	1.000	.155	1250	950
	S0810TB	.187	.625	F .257-.261	.530	.120	1.250	.155	1250	950

NOTES: All dimensions in inches. Strength values are typical ultimate in lbf. MATERIAL: Zinc Plated Steel Body / Steel Mandrel - RoHS Compliant | BLACK: Add "BL" suffix for painted DISCLAIMER: Steel tri-bulb specifications are industry standard values. Verify with your supplier before use.