


ALUMINUM / ALUMINUM TRI-BULB BLIND RIVETS
TESTED ACCORDING TO IFI-135 AND ISO-14589

ALUMINUM / ALUMINUM
TESTED ACCORDING TO IFI

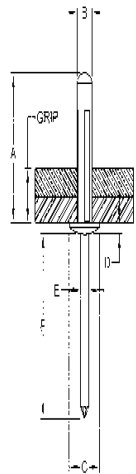

NOM DIA	PART#	GRIP RANGE		HOLE SIZE	HEAD DIA.	HEAD HT.	BODY LEN.	MAND DIA.	SHEAR LBS	TENSILE LBS
5/32"	A0516ATB	.039	.118	#20 .160-.164	.315	.055	.630	.091	134	224
	A0523ATB	.039	.276	#20 .160-.164	.315	.055	.835	.091	134	224
3/16"	A0619ATB	.039	.157	#11 .192-.196	.386	.071	.720	.115	202	269
	A0622ATB	.039	.248	#11 .192-.196	.386	.071	.807	.115	202	269
	A0625ATB	.039	.354	#11 .192-.196	.386	.071	.925	.115	202	269
	A0630ATB	.157	.472	#11 .192-.196	.386	.071	1.063	.115	202	269
3/16"LF	AL0625ATB	.039	.354	#11 .192-.196	.551	.079	.925	.115	202	269

NOTES: All dimensions in inches. Strength values are typical ultimate in lbf. MATERIAL: 5052 Aluminum Body / Aluminum Mandrel - RoHS Compliant | BLACK: Add "BL" suffix (e.g., A0625ATBBL) SOURCE: Data verified from Marson/Howmet catalog and authorized distributor specifications.